

Cooper Bussmann® Services & Application Guide

Downtime Reduction, Workplace Safety & Code Compliance

Services to Increase Your Productivity Through Protection

Section Contents

Cooper Bussmann Services

Engineering	370
Engineering – OSCAR™ Compliance Software	371
Training	372
Testing	373
Custom products	374

Application Guide

Fuse technology	375-381
Motor circuit branch circuit protection	382
Glossary	383-385
Out-of-stock substitution/upgrades	385
Cooper Bussmann electrical trademarks	385
Industrial & commercial fuse applications	386
Catalog number index	387-391
Sales support & manufacturing facilities	392

RED indicates **NEW** information



Engineering

Arc-Flash Safety and Productivity

The Cooper Bussmann® Services team has the experience in power system design, analysis and electrical safety to best assess and make recommendations that offer maximum protection and productivity. We go beyond just understanding electrical standards and regulations, actively participating in improving circuit protection and electrical safety.

Our comprehensive service offerings include:

- Electrical Network Analysis
- Short-Circuit Current Analysis
- Arc-Flash Hazard Analysis
- Arc-Flash Labeling
- Electrical Safety Program Development
- Coordination Studies
- Annual Maintenance

To Order:

To find out more contact your local Cooper Bussmann® representative, or visit us online at www.cooperbussmann.com/services.

SCCR Panel Design & Review

If you find you or your customer's SCCR needs improvement, contact the Cooper Bussmann engineering team for a design review. Our specialized knowledge of this new standard will help you get the rating your customer's needs:

- *Find it* SCCR Service: We will take your current design and determine your existing assembly SCCR.
- *Fix it* SCCR Service: We will review your current design and offer solutions to achieve the SCCR you desire.

**MONEY BACK
GUARANTEE**

Our SCCR service results are backed by
UL508A supplement SB (SCCR)
Pre-certification guarantee.
If you receive a Variation notice from
UL based upon the rating or
recommendations we provide, we will refund
in full the money you spent
on our service.

Engineering Catalog Numbers		
Description		Catalog Number
One Line Description Development		CBSV-ES-EN1
Data Collection		CBSV-ES-EN2
Short-Circuit Study		CBSV-ES-EN3
Selective Coordination Study		CBSV-ES-EN4
Arc-Flash Study		CBSV-ES-EN5
Labeling		CBSV-ES-EN6
Arc-Flash Training		CBSV-ES-EN7
Maintenace Plan for Arc-Flash Study		CBSV-ES-EN8
Safety Program Development		CBSV-ES-EN9
OSCAR™ Compliance Software	Annual Subscription	CBSV-SC-EN1
SCCR Plan Design & Review	<i>Find It</i> 1-5 Circuits	CBSV-SC-EN2
SCCR Plan Design & Review	<i>Fix It</i> 1-5 Circuits	CBSV-SC-EN3
SCCR Plan Design & Review	<i>Find It</i> 6-10 Circuits	CBSV-SC-EN4
SCCR Plan Design & Review	<i>Fix It</i> 6-10 Circuits	CBSV-SC-EN5
SCCR Plan Design & Review	<i>Find It</i> More than 10 Circuits	CBSV-SC-EN6
SCCR Plan Design & Review	<i>Fix It</i> More than 10 Circuits	CBSV-SC-EN7



Engineering – OSCAR™ compliance software

Eliminates Guesswork in Assembly SCCR Calculations

The Cooper Bussmann® innovative OSCAR™ (Online Short-Circuit Current UL508A Rating) Compliance Software helps you comply with new Code and standards* requirements for short-circuit current ratings as they relate to industrial panels, equipment and assemblies.

The Cooper Bussmann® OSCAR™ Compliance Software easily guides you through entering your panel's components for supply, feeder, sub-feeder and branch circuits. And, based upon the component types or part numbers you enter, the software determines the assembly SCCR per UL508A Supplement SB.

- **It's Automatic:** The software determines the assembly SCCR of industrial control panel assemblies per UL508A SB
- **It's Simple:** The OSCAR Compliance Software is backed by a database containing more than 50,000 line item part numbers with their component SCCR.
- **Available Online:** Use it as much as you want. This software is available 24/7—365 with a one-year subscription.
- **Continually Updated:** The OSCAR Compliance Software is regularly updated with new part numbers, their component SCCRs, and any changes that may occur to Code requirements and agency standards.
- **Flexible:** The custom device option allows for entering specialized component rating information for devices not found in the OSCAR database.

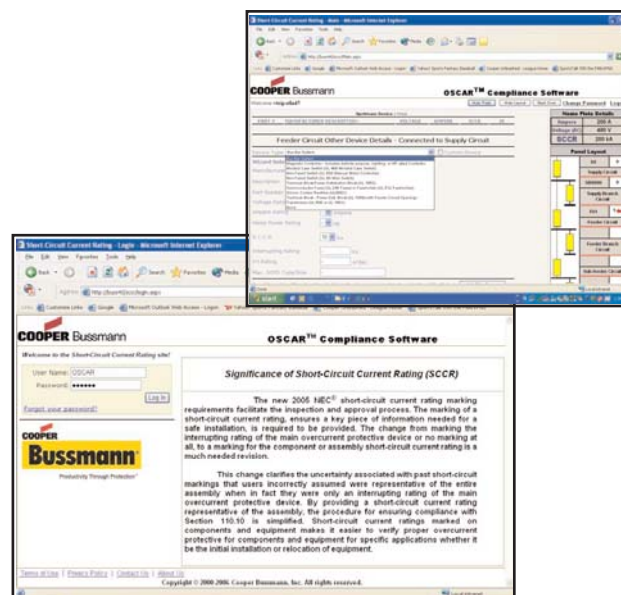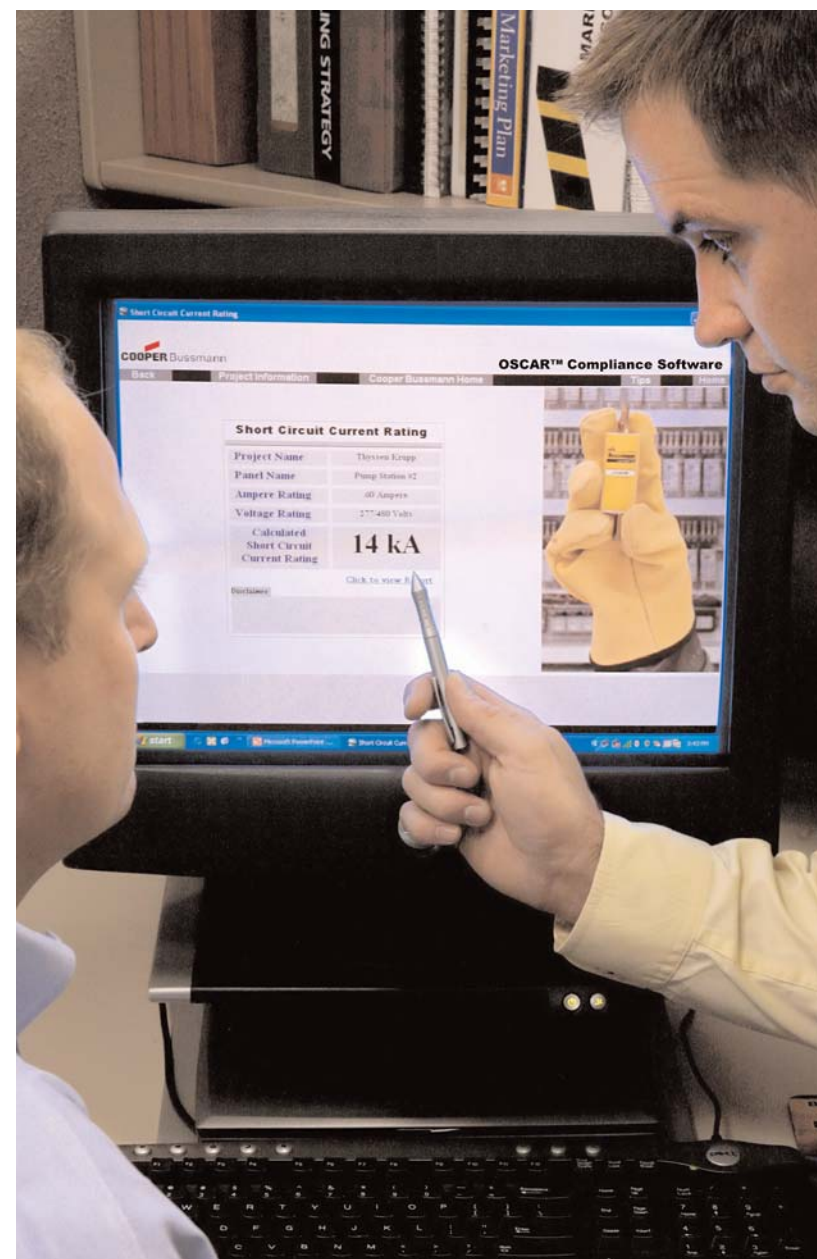

*Underwriter's Laboratories now requires all electrical panels and assemblies manufactured to standard 508A be marked with their SCCR. Article 409 of the 2005 National Electrical Code® mandates that industrial equipment and control panels must be marked with their assembly SCCR. NEC® Article 110.10 specifies equipment cannot be installed where available fault current exceeds the assembly SCCR.

To Subscribe:

Contact your local Cooper Bussmann® distributor, or visit us online at www.cooperbussmann.com/services.

Order Information

Description
OSCAR™ Compliance Software
Annual Subscription

Catalog Number
CBSV-SC-EN1

Training



Knowledge That Minimizes Risk to Maximize Productivity and Protection

Technology evolves, the Code and standards change, and new personnel are joining your customers' operation. How does your customers manage this changing environment while still focusing on what they do best – running their operation? Expert training from Cooper Bussmann is the solution. We provide the training when and where they need it. Cooper Bussmann can deliver our world-class safety and technical training on-site at your facility or ours.

Training:

To arrange a Cooper Bussmann® training seminar, contact your local Cooper Bussmann representative, or email us at services@cooperbussmann.com.



Publications and e-Training Modules

Cooper Bussmann® Services has developed advanced, value-added technical resources to meet the more demanding needs around Code compliance, and electrical design and safety.

How To Order:

For detailed descriptions on this portfolio visit www.cooperbussmann.com/services. Hardcopy materials are available through your local Cooper Bussmann distributor.

Training Catalog Numbers		
Description		Catalog Number
Designing Commercial & Industrial Power Systems	Per Person	CBSV-ES-ED1
Understanding Short-Circuit Current Rating Basics	1 Hour	CBTR-SC-1HP
Designing Panels with Higher SCCRs	2 Hour	CBTR-SC-2HP
Understanding Electrical Safety Basics	1 Hour	CBTR-ES-1HP
Electrical Hazards and Designing for Safety	2 Hour	CBTR-ES-2HP
NFPA 70E Workplace Guidelines	8 Hours (0.8 CEU)	CBTR-ES-1DA
Safety Basics User Kit	Hard Copy	CBSV-ES-ED3
Safety Basics Trainer Kit	Hard Copy	CBSV-ES-ED4
Safety Basics Video (VHS)	Hard Copy	CBSV-ES-ED5
Safety Basics CD	Hard Copy	CBSV-ES-ED6
Safety Basics Handbook	Hard Copy	CBPUB-ES-ED1H
Selecting Protective Devices (SPD)	Hard Copy	CBPUB-ES-ED2H
Electrical Plan Review (EPR) and Answer Sheet	Hard Copy	CBPUB-ES-ED3H
Interrupting Rating Overcurrent Protection DVD	Hard Copy	CBPUB-ES-ED30H
Selective Coordination: Preventing Blackouts DVD	Hard Copy	CBPUB-ES-ED31H
Current Limitation Overcurrent Protection DVD	Hard Copy	CBPUB-ES-ED32H
Motor Starter Protection: Overcurrent DVD	Hard Copy	CBPUB-ES-ED33H
Motor Protection DVD	Hard Copy	CBPUB-ES-ED34H
Specification Grade Protection DVD	Hard Copy	CBPUB-ES-ED35H
Overcurrent Protection 6 DVD Set	Hard Copy	CBPUB-ES-ED36H

Testing



Wide Range of Capability

Built to exceed the short circuit capacity of today's high power electrical distribution systems, the Gubany Center performs:

- Ultra-High Power Testing from 200kA to 300kA at 600Vac three phase
- Medium Power Testing from 5kA to 200kA at 600Vac three phase
- Low Power Testing up to 5kA at 600Vac three phase.

Our technicians conduct tests to many global agency standards including:

- ANCE
- ANSI
- CE
- CSA
- ETL
- IEC, and
- Underwriters Laboratories

To Order:

To find out more contact your local Cooper Bussmann® representative, or visit us online at www.cooperbussmann.com/services.

Performance and Compliance Certification for Components and Assemblies

The Cooper Bussmann® Paul P. Gubany Center at Cooper Bussmann is the electrical industry's most comprehensive facility for testing and certifying electrical components and assemblies.

OEM customers make the Gubany Center their first choice in testing equipment such as:

- Drives, both ac and dc
- Circuit breakers
- Motor control centers
- Soft starters
- Fuses
- Power distribution panels
- Surge suppressors
- Cables



Testing Catalog Numbers		
Description		Catalog Number
High Power Testing	Hourly Rate	CBSV-ES-TEHP
Medium Power Testing	Hourly Rate	CBSV-ES-TEMP
Low Power Testing	Hourly Rate	CBSV-ES-TELP

Custom products

Creating the Right Answers to Unique or Demanding Needs

When you wish to gain a competitive edge or improve your product's performance, have Cooper Bussmann provide a custom product that can:

- Improve functionality and utility
- Fit unique design needs
- Reduce labor and component costs

Our Expertise Is Your Advantage

For over 90 years, Cooper Bussmann has designed and manufactured products that improve electrical safety and performance. Whether it's modifying an existing product or creating a new one, our experience effectively brings together the skills to design, prototype, test, manufacture and secure agency approvals to deliver a single component, sub-assembly or finished product.

Cooper Bussmann can design and manufacture products that integrate:

- Fuses - with the right size and performance characteristics
- Fuse holders and blocks - with the requisite terminations, mounting options and safety features
- Wire connection products - that make wiring simpler, safer and faster
- Molded products - that give the unique shape your product needs
- Power distribution products - that meet prevailing agency and Code requirements

In-House Testing

All electrical performance testing of your custom products can be performed at the Cooper Bussmann® Paul P. Gubany Center, an ASTA and CSA accredited, and an ANCE Designated facility.

We're able to conduct electrical performance testing that replicates any power system to be encountered in any country, covering:

- Up to 300kA and 600Vac
- Up to 100kA and 1000Vdc

And our technicians conduct tests to many global agency standards including:

- ANCE
- ANSI
- CE
- CSA
- ETL
- IEC, and
- Underwriters Laboratories



To Find Out More:

If you need a custom solution to a product problem, submit a Request for Quotation to your local authorized Cooper Bussmann® distributor or sales representative. The form is located online at www.cooperbussmann.com/custom.



Did You Know?

Handle High Current in a Small Footprint

Problem: A company building equipment to monitor high current and voltage loads at electrical utilities needed a method to connect wires that would fit an established footprint and withstand a current of 500 amps for one second.

Solution: Building a terminal block with the customer-specified footprint and withstand levels, plus meet UL requirements for minimum spacing between terminals, had never been done in such a small a package. To meet the design objectives, prototype terminals were built in varying sizes to test what cross section was needed to withstand the 500A/1-second interval. Both the withstand and UL spacing requirements were designed into one package, tested and working to the customer's specification before producing the tooling for production runs. The results exceeded customer expectations, with overwhelming acceptance in the marketplace.

Fuse technology

Circuit Protection

Electrical distribution systems are often quite complicated. They cannot be absolutely fail-safe. Circuits are subject to destructive overcurrents. Harsh environments, general deterioration, accidental damage, damage from natural causes, excessive expansion, and/or overloading of the electrical distribution system are factors which contribute to the occurrence of such overcurrents. Reliable protective devices prevent or minimize costly damage to transformers, conductors, motors, and the other many components and loads that make up the complete distribution system. Reliable circuit protection is essential to avoid the severe monetary losses which can result from power blackouts and prolonged downtime of facilities. It is the need for reliable protection, safety, and freedom from fire hazards that has made the fuse a widely used protective device.

Overcurrents

An overcurrent is either an overload current or a short-circuit current. The overload current is an excessive current relative to normal operating current, but one which is confined to the normal conductive paths provided by the conductors and other components and loads of the distribution system. As the name implies, a short-circuit current is one which flows outside the normal conducting paths.

Overloads

Overloads are most often between one and six times the normal current level. Usually, they are caused by harmless temporary surge currents that occur when motors are started-up or transformers are energized. Such overload currents, or transients, are normal occurrences. Since they are of brief duration, any temperature rise is trivial and has no harmful effect on the circuit components. (It is important that protective devices do not react to them.)

Continuous overloads can result from defective motors (such as worn motor bearings), overloaded equipment, or too many loads on one circuit. Such sustained overloads are destructive and must be cut off by protective devices before they damage the distribution system or system loads. However, since they are of relatively low magnitude compared to short-circuit currents, removal of the overload current within minutes will generally prevent equipment damage. A sustained overload current results in overheating of conductors and other components and will cause deterioration of insulation, which may eventually result in severe damage and short-circuits if not interrupted.

Short-Circuits

Whereas overload currents occur at rather modest levels, the short-circuit or fault current can be many hundred times larger than the normal operating current. A high level fault may be 50,000A (or larger). If not cut off within a matter of a few thousandths of a second, damage and destruction can become rampant—there can be severe insulation damage, melting of conductors, vaporization of metal, ionization of gases, arcing, and fires.

Simultaneously, high level short-circuit currents can develop huge magnetic-field stresses. The magnetic forces between bus bars and other conductors can be many hundreds of pounds per linear foot; even heavy bracing may not be adequate to keep them from being warped or distorted beyond repair.

Fuses

The fuse is a reliable overcurrent protective device. A “fusible” link or links encapsulated in a tube and connected to contact terminals comprise the fundamental elements of the basic fuse. Electrical resistance of the link is so low that it simply acts as a conductor. However, when destructive currents occur, the link very quickly melts and opens the circuit to protect conductors and other circuit components and loads. Fuse characteristics are stable. Fuses do not require periodic maintenance or testing. Fuses have three unique performance characteristics:

1. Modern fuses have an extremely “high interrupting rating”—can withstand very high fault currents without rupturing.
2. Properly applied, fuses prevent “blackouts.” Only the fuse nearest a fault opens without upstream fuses (feeders or mains) being affected—fuses thus provide “selective coordination.” (These terms are precisely defined in subsequent pages.)
3. Fuses provide optimum component protection by keeping fault currents to a low value... They are said to be “current limiting.”

Voltage Rating

The voltage rating of a fuse must be at least equal to or greater than the circuit voltage. It can be higher but never lower. For instance, a 600V fuse can be used in a 208V circuit.

The voltage rating of a fuse is a function of its capability to open a circuit under an overcurrent condition. Specifically, the voltage rating determines the ability of the fuse to suppress the internal arcing that occurs after a fuse link melts and an arc is produced. If a fuse is used with a voltage rating lower than the circuit voltage, arc suppression will be impaired and, under some fault current conditions, the fuse may not clear the overcurrent safely. Special consideration is necessary for semiconductor fuse and medium voltage fuse applications, where a fuse of a certain voltage rating is used on a lower voltage circuit.

Ampere Rating

Every fuse has a specific amp rating. In selecting the amp rating of a fuse, consideration must be given to the type of load and code requirements. The amp rating of a fuse normally should not exceed the current carrying capacity of the circuit. For instance, if a conductor is rated to carry 20A, a 20A fuse is the largest that should be used. However, there are some specific circumstances in which the amp rating is permitted to be greater than the current carrying capacity of the circuit.

Fuse technology


A typical example is the motor circuit; dual-element fuses generally are permitted to be sized up to 175% and non-time-delay fuses up to 300% of the motor full-load amps. As a rule, the amp rating of a fuse and switch combination should be selected at 125% of the continuous load current (this usually corresponds to the circuit capacity, which is also selected at 125% of the load current). There are exceptions, such as when the fuse-switch combination is approved for continuous operation at 100% of its rating.

Interrupting Rating

A protective device must be able to withstand the destructive energy of short-circuit currents. If a fault current exceeds the capability of the protective device, the device may actually rupture, causing additional damage. Thus, it is important when applying a fuse or circuit breaker to use one which can sustain the largest potential short-circuit currents. The rating which defines the capacity of a protective device to maintain its integrity when reacting to fault currents is termed its "interrupting rating". The interrupting rating of most branch-circuit, molded case, circuit breakers typically used in residential service entrance panels is 10,000A. (Please note that a molded case circuit breaker's interrupting capacity will typically be lower than its interrupting rating.) Larger, more expensive circuit breakers may have interrupting ratings of 14,000A or higher. In contrast, most modern, current-limiting fuses have an interrupting rating of 200,000 or 300,000A and are commonly used to protect the lower rated circuit breakers. The National Electrical Code, Section 110-9, requires equipment intended to break current at fault levels to have an interrupting rating sufficient for the current that must be interrupted.

Selective Coordination – Prevention of Blackouts


The coordination of protective devices prevents system power outages or blackouts caused by overcurrent conditions. When only the protective device nearest a faulted circuit opens and larger upstream fuses remain closed, the protective devices are "selectively" coordinated (they discriminate). The word "selective" is used to denote total coordination...isolation of a faulted circuit by the opening of only the localized protective device.

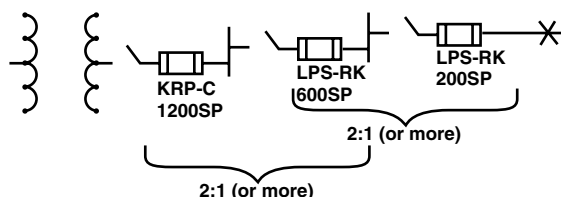


This diagram shows the minimum ratios of amp ratings of Low-Peak Yellow fuses that are required to provide "selective coordination" (discrimination) of upstream and downstream fuses.

Unlike electromechanical inertial devices (circuit breakers), it is a simple matter to selectively coordinate fuses of modern design. By maintaining a minimum ratio of fuse-amp ratings between an upstream and downstream fuse, selective coordination is assured.

Current Limitation – Component Protection

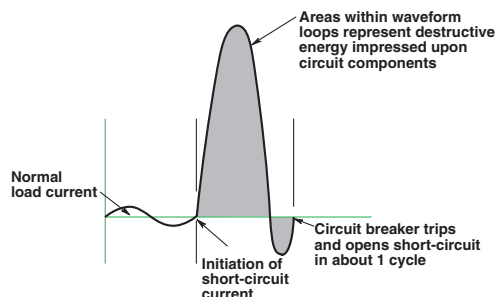

A non-current-limiting protective device, by permitting a short-circuit current to build up to its full value, can let an immense amount of destructive short-circuit heat energy through before opening the circuit.



A current-limiting fuse has such a high speed of response that it cuts off a short-circuit long before it can build up to its full peak value.

If a protective device cuts off a short-circuit current in less than one-quarter cycle, before it reaches its total available (and highly destructive) value, the device is a "current-limiting" device. Most modern fuses are current-limiting. They restrict fault currents to such low values that a high degree of protection is given to circuit components against even very high short-circuit currents. They permit breakers with lower interrupting ratings to be used. They can reduce bracing of bus structures. They minimize the need of other components to have high short-circuit current "withstand" ratings. If not limited, short-circuit currents can reach levels of 30,000 or 40,000A or higher in the first half cycle (.008 seconds, 60Hz) after the start of a short-circuit. The heat that can be produced in circuit components by the immense energy of short-circuit currents can cause severe insulation damage or even explosion. At the same time, huge magnetic forces developed between conductors can crack insulators and distort and destroy bracing structures. Thus, it is important that a protective device limit fault currents before they reach their full potential level.

Fuse technology

Operating Principles of Cooper Bussmann® Fuses

The principles of operation of the modern, current-limiting fuses are covered in the following paragraphs.

Non-Time-Delay Fuses

The basic component of a fuse is the link. Depending upon the amp rating of the fuse, the single-element fuse may have one or more links. They are electrically connected to the end blades (or ferrules) (see Figure 1) and enclosed in a tube or cartridge surrounded by an arc quenching filler material. Cooper Bussmann® Limitron® and T-Tron® fuses are both single-element fuses.

Under normal operation, when the fuse is operating at or near its amp rating, it simply functions as a conductor. However, as illustrated in Figure 2, if an overload current occurs and persists for more than a short interval of time, the temperature of the link eventually reaches a level which causes a restricted segment of the link to melt. As a result, a gap is formed and an electric arc established. However, as the arc causes the link metal to burn back, the gap becomes progressively larger. Electrical resistance of the arc eventually reaches such a high level that the arc cannot be sustained and is extinguished. The fuse will have then completely cut off all current flow in the circuit. Suppression or quenching of the arc is accelerated by the filler material. (See Figure 3.)

Single-element fuses of present day design have a very high speed of response to overcurrents. They provide excellent short-circuit component protection. However, temporary, harmless overloads or surge currents may cause nuisance openings unless these fuses are oversized. They are best used, therefore, in circuits not subject to heavy transient surge currents and the temporary over-load of circuits with inductive loads such as motors, transformers, solenoids, etc. Because single-element, fast-acting fuses such as Limitron and T-Tron fuses have a high speed of response to short-circuit currents, they are particularly suited for the protection of circuit breakers with low interrupting ratings.

Whereas an overload current normally falls between one and six times normal current, short-circuit currents are quite high. The fuse may be subjected to short-circuit currents of 30,000 or 40,000A or higher. Response of current limiting fuses to such currents is extremely fast. The restricted sections of the fuse link will simultaneously melt (within a matter of two or three-thousandths of a second in the event of a high-level fault current).

The high total resistance of the multiple arcs, together with the quenching effects of the filler particles, results in rapid arc suppression and clearing of the circuit. (Refer to Figures 4 & 5) Short-circuit current is cut off in less than a half-cycle, long before the short-circuit current can reach its full value (fuse operating in its current limiting range).



Figure 1. Cutaway view of typical single-element fuse.



Figure 2. Under sustained overload, a section of the link melts and an arc is established.



Figure 3. The "open" single-element fuse after opening a circuit overload.



Figure 4. When subjected to a short-circuit current, several sections of the fuse link melt almost instantly.



Figure 5. The "open" single-element fuse after opening a short circuit.

Fuse technology

Cooper Bussmann® Dual-Element Fuses

There are many advantages to using these fuses. Unlike single-element fuses, the Cooper Bussmann® dual-element, time-delay fuses can be sized closer to provide both high performance short-circuit protection and reliable overload protection in circuits subject to temporary overloads and surge currents. For ac motor loads, a single-element fuse may need to be sized at 300% of an a.c. motor current in order to hold the starting current. However, dual-element, time delay fuses can be sized much closer to motor loads. For instance, it is generally possible to size Fusetron Dual-Element Fuses, FRS-R and FRN-R and Low-Peak® Dual-Element Fuses, LPS-RK_SP and LPN-RK_SP, at 125% and 130% of motor full load current, respectively. Generally, the Low-Peak Dual-Element Fuses, LPJ_SP, and CUBEFuse™, TCF, can be sized at 150% of motor full load amps. This closer fuse sizing may provide many advantages such as: (1) smaller fuse and block, holder or disconnect amp rating and physical size, (2) lower cost due to lower amp rated devices and possibly smaller required panel space, (3) better short-circuit protection – less short-circuit current let-through energy, and (4) potential reduction in the arc-flash hazard.



Figure 6. This is the LPS-RK100SP, a 100A, 600V Low-Peak, Class RK1, Dual-Element Fuse that has excellent time-delay, excellent current-limitation and a 300,000A interrupting rating. Artistic liberty is taken to illustrate the internal portion of this fuse. The real fuse has a non-transparent tube and special small granular, arc-quenching material completely filling the internal space.

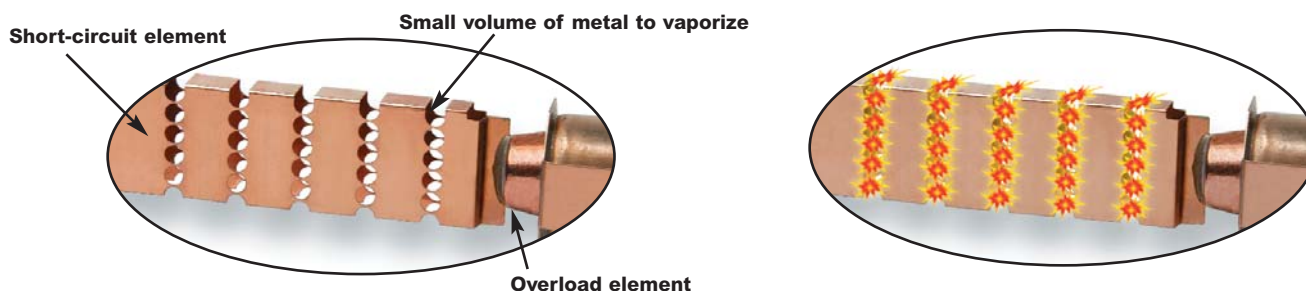


Figure 7. The true dual-element fuse has distinct and separate overload element and short-circuit element.

Figure 9. Short-circuit operation: Modern fuses are designed with minimum metal in the restricted portions which greatly enhance their ability to have excellent current-limiting characteristics – minimizing the short circuit let-through current. A short-circuit current causes the restricted portions of the short-circuit element to vaporize and arcing commences. The arcs burn back the element at the points of the arcing. Longer arcs result, which assist in reducing the current. Also, the special arc quenching filler material contributes to extinguishing the arcing current. Modern fuses have many restricted portions, which results in many small arclets – all working together to force the current to zero.

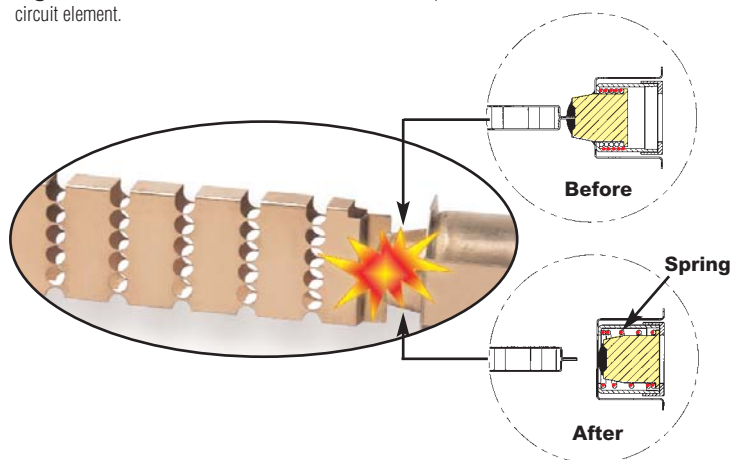


Figure 8. Overload operation: Under sustained overload conditions, the trigger spring fractures the calibrated fusing alloy and releases the “connector”. The insets represent a model of the overload element before and after. The calibrated fusing alloy connecting the short-circuit element to the overload element fractures at a specific temperature due to a persistent overload current. The coiled spring pushes the connector from the short-circuit element and the circuit is interrupted.

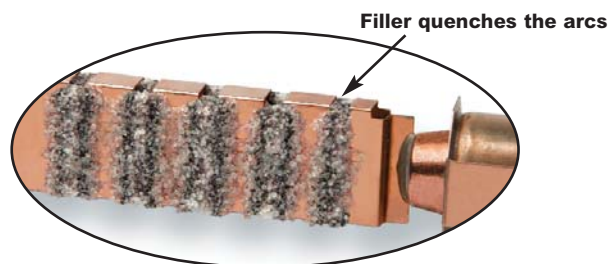


Figure 10. Short-circuit operation: The special small granular, arc-quenching material plays an important part in the interruption process. The filler assists in quenching the arcs; the filler material absorbs the thermal energy of the arcs, fuses together and creates an insulating barrier. This process helps in forcing the current to zero. Modern current-limiting fuses, under short-circuit conditions, can force the current to zero and complete the interruption within a few thousandths of a second.

When the short-circuit current is in the current-limiting range of a fuse, it is not possible for the full available short-circuit current to flow through the fuse – it's a matter of physics. The small restricted portions of the short-circuit element quickly vaporize and the filler material assists in forcing the current to zero. The fuse is able to “limit” the short-circuit current.

Overcurrent protection must be reliable and sure. Whether it is the first day of the electrical system or thirty or more years later, it is important that overcurrent protective devices perform under overload or short-circuit conditions as intended. Modern current-limiting fuses operate by very simple, reliable principles.

Fuse technology

Fuse Time-Current Curves



When a low level overcurrent occurs, a long interval of time will be required for a fuse to open (melt) and clear the fault. On the other hand, if the overcurrent is large, the fuse will open very quickly. The opening time is a function of the magnitude of the level of overcurrent. Overcurrent levels and the corresponding intervals of opening times are logarithmically plotted in graph form as shown to the right. Levels of overcurrent are scaled on the horizontal axis; time intervals on the vertical axis. The curve is thus called a “time-current” curve.

This particular plot reflects the characteristics of a 200A, 250V, Low-Peak dual-element fuse. Note that at the 1,000A overload level, the time interval which is required for the fuse to open is 10 seconds. Yet, at approximately the 2,200A overcurrent level, the opening (melt) time of a fuse is only 0.01 seconds. It is apparent that the time intervals become shorter as the overcurrent levels become larger. This relationship is termed an inverse time-to-current characteristic. Time-current curves are published or are available on most commonly used fuses showing “minimum melt,” “average melt” and/or “total clear” characteristics. Although upstream and downstream fuses are easily coordinated by adhering to simple amp ratios, these time-current curves permit close or critical analysis of coordination.

Better Motor Protection in Elevated Ambients

The derating of dual-element fuses based on increased ambient temperatures closely parallels the derating curve of motors in elevated ambient. This unique feature allows for optimum protection of motors, even in high temperatures.

Affect of ambient temperature on operating characteristics of Fusetron and Low-Peak Dual-Element Fuses.

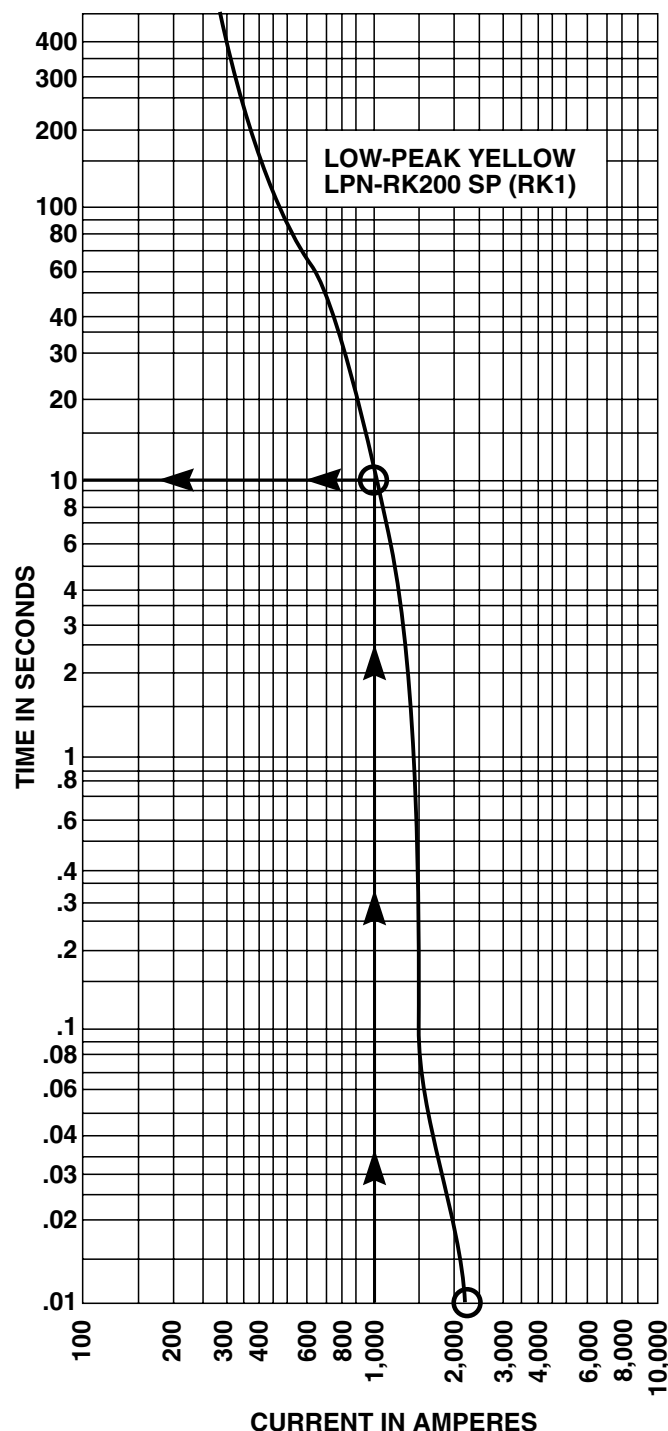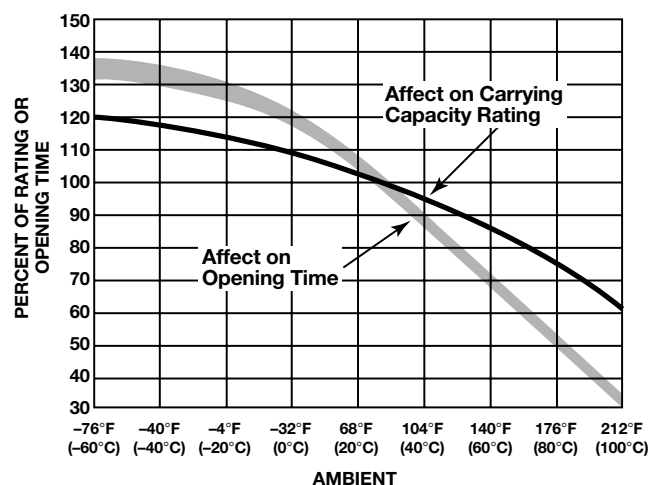

Fuse technology

Better Protection Against Motor Single Phasing

When secondary single-phasing occurs, the current in the remaining phases increases to approximately 200% rated full load current. (Theoretically 173%, but change in efficiency and power factor make it about 200%.) When primary single-phasing occurs, unbalanced voltages occur on the motor circuit causing currents to rise to 115%, and 230% of normal running currents in delta-wye systems.

Dual-element fuses sized for motor running overload protection will help to protect motors against the possible damages of single-phasing.

Classes of Fuses

Safety is the industry mandate. However, proper selection, overall functional performance and reliability of a product are factors which are not within the basic scope of listing agency activities. In order to develop its safety test procedures, listing agencies develop basic performance and physical specifications or standards for a product. In the case of fuses, these standards have culminated in the establishment of distinct classes of low-voltage (600V or less) fuses; Classes RK1, RK5, G, L, T, J, H and CC being the more important.

The fact that a particular type of fuse has, for instance, a classification of RK1, does not signify that it has the identical function or performance characteristics as other RK1 fuses. In fact, the Limitron® non-time-delay fuse and the Low-Peak dual-element, time-delay fuse are both classified as RK1. Substantial differences in these two RK1 fuses usually requires considerable difference in sizing. Dimensional specifications of each class of fuse does serve as a uniform standard.

Class R Fuses

Class R ("R" for rejection) fuses are high performance, 1/2 to 600A units, 250V and 600V, having a high degree of current limitation and a short-circuit interrupting rating of up to 300,000A (RMS Sym.). Cooper Bussmann® Class R fuses include Class RK1 Low-Peak® and Limitron® fuses, and RK5 Fusetron fuses. They have replaced the K1 Low-Peak and Limitron fuses and K5 Fusetron fuses. These fuses are identical, with the exception of a modification in the mounting configuration called a "rejection feature." This feature permits Class R fuses to be mounted in rejection type fuse-clips. "R" type fuseclips prevent older type Class H, ONE-TIME and RENEWABLE fuses from being installed. The use of Class R fuse holders is thus an important safeguard. The application of Class R fuses in such equipment as disconnect switches permits the equipment to have a high interrupting rating. NEC® Articles 110-9 and 230-65 require that protective devices have adequate capacity to interrupt short-circuit currents. Article 240-60(b) requires fuse holders for current-limiting fuses to reject non-current-limiting type fuses.



In the above illustration, a grooved ring in one ferrule provides the rejection feature of the Class R fuse in contrast to the lower interrupting rating, non-rejection type.

Branch-Circuit Listed Fuses

Branch-circuit listed fuses are designed to prevent the installation of fuses that cannot provide a comparable level of protection to equipment.

The characteristics of Branch-circuit fuses are:

1. They must have a minimum interrupting rating of 10,000A
2. They must have a minimum voltage rating of 125V.
3. They must be size rejecting such that a fuse of a lower voltage rating cannot be installed in the circuit.
4. They must be size rejecting such that a fuse with a current rating higher than the fuse holder rating cannot be installed.

Fuse technology

Supplementary Overcurrent Protective Devices for use in Motor Control Circuits

Branch Circuit vs. Supplemental Overcurrent Protective Devices

Branch circuit overcurrent protective devices (OCPD) can be used everywhere OCPD are used, from protection of motors and motor circuits and group motor circuits, to protection of distribution and utilization equipment. Supplemental OCPD can only be used where proper protection is already being provided by a branch circuit device, by exception [i.e., 430.72(A)], or if protection is not required. Supplemental OCPD can often be used to protect motor control circuits but they cannot be used to protect motors or motor circuits. A very common misapplication is the use of a supplementary overcurrent protective device such as a UL 1077 mechanical overcurrent device for motor branch circuit short-circuit and ground fault protection. Supplementary OCPDs are incomplete in testing compared to devices that are evaluated for branch circuit protection. **THIS IS A SERIOUS MISAPPLICATION AND SAFETY CONCERN!!** Caution should be taken to assure that the proper overcurrent protective device is being used for the application at hand. Below is a description of popular supplementary overcurrent protective devices.

Most supplemental overcurrent protective devices have very low interrupting ratings. Just as any other overcurrent protective device, supplemental OCPDs must have an interrupting rating equal to or greater than the available short-circuit current.



Supplemental fuses as listed or recognized to the UL/CSA/ANCE Trinalational 248-14 Standard

These are fuses that can have many voltages and interrupting ratings within the same case size. Examples of supplemental fuses are $\frac{1}{2}$ " X $1\frac{1}{2}$ ", 5 x 20mm, and $\frac{1}{4}$ " x $1\frac{1}{4}$ " fuses. Interrupting ratings range from 35 to 100,000 amperes.

Reliability and Maintenance of Overcurrent Protective Devices

Modern fuses have several significant advantages over mechanical overcurrent protective devices - one of those advantages is reliability. Whether the first day of the electrical system or years later, it is important that overcurrent protective devices perform under overload and fault conditions as intended.

Modern current-limiting fuses operate by very simple, reliable principles. Fuses do not have to be maintained. By their inherent design, fuses do not have elements or mechanisms to calibrate, adjust or lubricate. If and when fuses are called upon to open on an overcurrent, installing the same type and ampere rated fuses provides the circuit with new factory-calibrated protection. The original design integrity can be maintained throughout the life of the electrical system. One last point on fuse systems; the terminations, clips and disconnects should be maintained as necessary.

In contrast, circuit breakers are mechanical devices, even those with electronic sensing, and circuit breakers require periodic maintenance, testing, and if necessary reconditioning or replacement. This is required per the circuit breaker manufacturers' instructions, NFPA 70B Recommended Practice for Electrical Equipment Maintenance, and NEMA AB4. If circuit breakers are not properly maintained, the interrupting rating, circuit component protection, coordination, and electrical safety may be compromised.

See www.cooperbussmann.com for more information on Reliability and Maintenance.

Motor circuit branch circuit protection

Motor Circuits – Choice of Overcurrent Protection

Motor circuits have unique characteristics and several functions, such as short-circuit protection, overload protection and automatic/ remote start/stop, that may be required. Sometimes the comment is made that users prefer circuit breakers because they can be reset. Let's examine the choice of either circuit breakers or current-limiting fuses for motor branch circuit protection.

In the case to be examined, fuses and circuit breakers (includes magnetic only circuit breakers which are called MCPs or motor circuit protectors) are sized with the intent to provide only short-circuit and ground fault protection for the motor branch circuit protection per 430.52. Other means, such as overload relays, provide the motor overload protection. Typical thermal magnetic circuit breakers can only be sized for motor branch circuit protection (typically 200% - 250% of motor current) because if they are sized closer, the motor starting current trips the circuit breaker's instantaneous mechanism. Magnetic only circuit breakers (MCPs) are intentionally not provided with overload capability; they only operate on short-circuit currents. There are some fuses such as the FRS-R and LPS-RK fuses that can be sized close enough for motor running overload protection or backup motor running protection. But for the discussion in this section, assume current-limiting fuses are sized only for motor short-circuit and ground fault protection.

It is important to note that in this protection level being discussed, a circuit breaker or fuses should only open if there is a fault on the motor circuit. A separate overload protective device, such as an overload relays, provides motor overload protection per 430.32. Here are some important considerations:

1. OSHA regulation 1910.334(b)(2) Use of Equipment states:

Reclosing circuits after protective device operation. After a circuit is deenergized by a circuit protective device, the circuit may not be manually reenergized until it has been determined that the equipment and circuit can be safely energized. The repetitive manual reclosing of circuit breakers or reenergizing circuits through replaced fuses is prohibited. NOTE: When it can be determined from the design of the circuit and the over-current devices involved that the automatic operation of a device was caused by an overload rather than a fault condition, no examination of the circuit or connected equipment is needed before the circuit is reenergized.

So the speed of reclosing a circuit breaker after a fault is not an advantage. The law requires that if the condition is a fault (that is the only reason the circuit breaker or fuses should open on a motor circuit), then the fault must be corrected prior to replacing fuses or resetting the circuit breaker.

2. *The typical level of short-circuit protection for the motor starter provided by circuit breakers and MCPs is referred to as Type 1. This is because most circuit breakers are not current-limiting. So, for a loadside fault, the starter may sustain significant damage such as severe welding of contacts and rupturing of the heater elements. Or the heater/overload relay system may lose calibration. This is an acceptable level of performance per UL508, which is the product standard for motor starters. Current-limiting fuses can be selected that can provide Type 2 "no damage" short-circuit protection for motor starters.*

Consequently, with circuit breaker protection, after a fault condition,

significant downtime and cost may be incurred in repairing or replacing the starter. With properly selected fuses for Type 2 protection, after the fault is repaired, only new fuses need to be inserted in the circuit; the starter does not have to be repaired or replaced.

3. *Circuit breakers must be periodically tested to verify they mechanically operate and electrically tested to verify they still are properly calibrated within specification. The circuit breaker manufacturers recommend this. Typically circuit breakers should be mechanically operated at least every year and electrically tested every 1 to 5 years, depending on the service conditions. Modern current-limiting fuses do not have to be maintained or electrically tested to verify they still will operate as intended. The terminations of both circuit breakers and fusible devices need to be periodically checked and maintained to prevent thermal damage. Plus fuse clips should be periodically inspected and if necessary maintained.*
4. *After a circuit breaker interrupts a fault, it may not be suitable for further service. UL489, the product standard for molded case circuit breakers, only requires a circuit breaker to interrupt two short-circuit currents at its interrupting rating. Circuit breakers that are rated 100 amps or less do not have to operate after only one short-circuit operation under "bus bar" short-circuit conditions. If the fault current is high, circuit breaker manufacturers recommend that a circuit breaker should receive a thorough inspection with replacement, if necessary. How does one know a circuit breaker's service history or what level of fault current that a circuit breaker interrupts? With modern current-limiting fuses, if the fuse interrupts a fault, new factory calibrated fuses are installed in the circuit. The original level of superior short-circuit protection can be there for the life of the motor circuit.*
5. *After a fault, the electrician has to walk back to the storeroom to get new fuses; that is if spare fuses are not stored adjacent to the equipment. This does require some additional down time. However, if fuses opened under fault conditions, there is a fault condition that must be remedied. The electrician probably will be going back to the storeroom anyway for parts to repair the fault. If properly selected current-limiting fuses are used in the original circuit, the starter will not sustain any significant damage or loss of overload calibration.*

With circuit breaker protection on motor circuits, after a fault condition, it may be necessary to repair or replace the starter, so a trip to the storeroom may be necessary. And if the starter is not significantly damaged, it may still need to be tested to insure the let-through energy by the circuit breaker has not caused the loss of starter overload calibration. Also, the circuit breaker needs to be evaluated for suitability before placing it back into service. Who is qualified for that evaluation? How much time will that take?

In summary, resettability is not an important feature for motor branch circuit (short-circuit) protection and resettability of the branch circuit protective device is not a benefit for motor circuits. As a matter of fact, resettability of the motor branch circuit overcurrent protective device may encourage an unsafe practice. The function of motor branch circuit protection is fault protection: short-circuit and ground fault protection. Faults do not occur on a regular basis. But when a fault does occur, it is important to have the very best protection. The best motor branch circuit protection can be judged by (1) reliability - its ability to retain its calibration and speed of operation over its lifetime, (2) current-limiting protection -its ability to provide Type 2 "no damage" protection to the motor starter, and (3) safety - its ability to meet a facility's safety needs. Modern current-limiting fuses are superior to circuit breakers for motor branch circuit protection.

Glossary

Ampere (Amp)

The measurement of intensity of rate of flow of electrons in an electric circuit. An ampere (amp) is the amount of current that will flow through a resistance of one ohm under a pressure of one volt.

Amp Rating

The current-carrying capacity of a fuse. When a fuse is subjected to a current above its amp rating, it will open the circuit after a predetermined period of time.

Amp Squared Seconds, I²t

The measure of heat energy developed within a circuit during the fuse's clearing. It can be expressed as "melting I²t", "arcing I²t" or the sum of them as "Clearing I²t". "I" stands for effective let-through current (RMS), which is squared, and "t" stands for time of opening, in seconds.

Arcing I²t

Value of the I²t during the arcing time under specified conditions.

Arcing Time

The amount of time from the instant the fuse link has melted until the overcurrent is interrupted, or cleared.

Breaking Capacity

(See Interrupting Rating)

Cartridge Fuse

A fuse consisting of a current responsive element inside a fuse tube with terminals on both ends.

Class CC Fuses

600V, 200,000A interrupting rating, branch circuit fuses with overall dimensions of $1\frac{3}{32}$ " x $1\frac{1}{2}$ ". Their design incorporates a rejection feature that allows them to be inserted into rejection fuse holders and fuse blocks that reject all lower voltage, lower interrupting rating $1\frac{3}{32}$ " x $1\frac{1}{2}$ " fuses. They are available from $\frac{1}{10}$ A through 30A.

Class G Fuses

480V, 100,000A interrupting rating branch circuit fuses that are size rejecting to eliminate overfusing. The fuse diameter is $1\frac{3}{32}$ " while the length varies from $1\frac{1}{16}$ " to $2\frac{1}{4}$ ". These are available in ratings from 1A through 60A.

Class H Fuses

250V and 600V, 10,000A interrupting rating branch circuit fuses that may be renewable or non-renewable. These are available in ampere ratings of 1 amp through 600A.

Class J Fuses

These fuses are rated to interrupt a minimum of 200,000A ac. They are labeled as "Current-Limiting", are rated for 600Vac, and are not interchangeable with other classes.

Class K Fuses

These are fuses listed as K-1, K-5, or K-9 fuses. Each subclass has designated I²t and I_p maximums. These are dimensionally the same as Class H fuses, and they can have interrupting ratings of 50,000, 100,000, or 200,000 A. These fuses are current-limiting. However, they are not marked "current-limiting" on their label since they do not have a rejection feature.

Class L Fuses

These fuses are rated for 601 through 6000A, and are rated to interrupt a minimum of 200,000A ac. They are labeled "Current-Limiting" and are rated for 600Vac. They are intended to be bolted into their mountings and are not normally used in clips. Some Class L fuses have designed in time-delay features for all purpose use.

Class R Fuses

These are high performance fuses rated $\frac{1}{10}$ -600A in 250V and 600V ratings. All are marked "Current Limiting" on their label and all have a minimum of 200,000A interrupting rating. They have identical outline dimensions with the Class H fuses but have a rejection feature which prevents the user from mounting a fuse of lesser capabilities (lower interrupting capacity) when used with special Class R Clips. Class R fuses will fit into either rejection or non-rejection clips.

Class T Fuses

An industry class of fuses in 300V and 600V ratings from 1 amp through 1200A. They are physically very small and can be applied where space is at a premium. They are fast acting fuses with an interrupting rating of 200,000A RMS.

Classes of Fuses

The industry has developed basic physical specifications and electrical performance requirements for fuses with voltage ratings of 600V or less. These are known as standards. If a type of fuse meets the requirements of a standard, it can fall into that class. Typical classes are K, RK1, RK5, G, L, H, T, CC, and J.

Clearing Time

The total time between the beginning of the overcurrent and the final opening of the circuit at rated voltage by an overcurrent protective device. Clearing time is the total of the melting time and the arcing time.

Current Limitation

A fuse operation relating to short circuits only. When a fuse operates in its current-limiting range, it will clear a short circuit in less than $\frac{1}{2}$ cycle. Also, it will limit the instantaneous peak let-through current to a value substantially less than that obtainable in the same circuit if that fuse were replaced with a solid conductor of equal impedance.

Glossary

Dual Element Fuse

Fuse with a special design that utilizes two individual elements in series inside the fuse tube. One element, the spring actuated trigger assembly, operates on overloads up to 5-6 times the fuse current rating. The other element, the short circuit section, operates on short circuits up to their interrupting rating.

Electrical Load

That part of the electrical system which actually uses the energy or does the work required.

Fast Acting Fuse

A fuse which opens on overload and short circuits very quickly. This type of fuse is not designed to withstand temporary overload currents associated with some electrical loads.

Fuse

An overcurrent protective device with a fusible link that operates and opens the circuit on an overcurrent condition.

High Speed Fuses

Fuses with no intentional time-delay in the overload range and designed to open as quickly as possible in the short-circuit range. These fuses are often used to protect solid-state devices.

Inductive Load

An electrical load which pulls a large amount of current—an inrush current—when first energized. After a few cycles or seconds the current “settles down” to the full-load running current.

Interrupting Capacity

(See Interrupting Rating)

Interrupting Rating — IR (Breaking Capacity)

The rating which defines a fuse’s ability to *safely* interrupt and clear short circuits. This rating is much greater than the ampere rating of a fuse. The NEC® defines Interrupting Rating as “The highest current at rated voltage that an overcurrent protective device is intended to interrupt under standard test conditions.”

Melting I²t

Value of the I²t during the melting time of the fuse link under specified conditions.

Melting Time

The amount of time required to melt the fuse link during a specified overcurrent. (See Arcing Time and Clearing Time.)

“NEC®” Dimensions

These are dimensions once referenced in the National Electrical Code. They are common to Class H and K fuses and provide interchangeability between manufacturers for fuses and fusible equipment of given ampere and voltage ratings.

Ohm

The unit of measure for electric resistance. An ohm is the amount of resistance that will allow one ampere to flow under a pressure of one volt.

Ohm’s Law

The relationship between voltage, current, and resistance, expressed by the equation $E = IR$, where E is the voltage in volts, I is the current in amps, and R is the resistance in ohms.

One Time Fuses

Generic term used to describe a Class H non-renewable cartridge fuse, with a single element.

Overcurrent

A condition which exists on an electrical circuit when the normal load current is exceeded. Overcurrents take on two separate characteristics—overloads and short circuits.

Overload

Can be classified as an overcurrent which exceeds the normal full load current of a circuit. Also characteristic of this type of overcurrent is that it does not leave the normal current carrying path of the circuit—that is, it flows from the source, through the conductors, through the load, back through the conductors, to the source again.

Peak Let-Through Current, I_p

The instantaneous value of peak current let-through by a current-limiting fuse, when it operates in its current-limiting range.

Renewable Fuse (600V & below)

A fuse in which the element, typically a zinc link, may be replaced after the fuse has opened, and then reused. Renewable fuses are made to Class H standards.

Resistive Load

An electrical load which is characteristic of not having any significant inrush current. When a resistive load is energized, the current rises instantly to its steady-state value, without first rising to a higher value.

RMS Current

The RMS (root-mean-square) value of any periodic current is equal to the value of the direct current which, flowing through a resistance, produces the same heating effect in the resistance as the periodic current does.

SCCR

See Short-Circuit Current Rating

Semiconductor Fuses

Fuses used to protect solid-state devices. See “High Speed Fuses.”

Short-Circuit

Can be classified as an overcurrent which exceeds the normal full load current of a circuit by a factor many times (tens, hundreds or thousands greater). Also characteristic of this type of overcurrent is that it leaves the normal current carrying path of the circuit—it takes a “short cut” around the load and back to the source.

Short-Circuit Current Rating (SCCR)

The maximum short-circuit current an electrical component can sustain without the occurrence of excessive damage when protected with an overcurrent protective device.

Short-Circuit Withstand Rating

Same definition as short-circuit rating.

Agencies & standards

Single Phasing

That condition which occurs when one phase of a three phase system opens, either in a low voltage (secondary) or high voltage (primary) distribution system. Primary or secondary single phasing can be caused by any number of events. This condition results in unbalanced currents in polyphase motors and unless protective measures are taken, causes overheating and failure.

Threshold Current

The symmetrical RMS available current at the threshold of the current-limiting range, where the fuse becomes current-limiting when tested to the industry standard. This value can be read off of a peak let-through chart where the fuse curve intersects the A-B line. A threshold ratio is the relationship of the threshold current to the fuse's continuous current rating.

Time-Delay Fuse

A fuse with a built-in delay that allows temporary and harmless inrush currents to pass without opening, but is so designed to open on sustained overloads and short circuits.

Total Clearing I²t

Total measure of heat energy developed within a circuit during the fuse's clearing of a fault current. Total Clearing I²t is the sum of the melting I²t and arcing I²t.

Voltage Rating

The maximum open circuit voltage in which a fuse can be used, yet safely interrupt an overcurrent. Exceeding the voltage rating of a fuse impairs its ability to clear an overload or short circuit safely.

Withstand Rating

The maximum current that an unprotected electrical component can sustain for a specified period of time without the occurrence of extensive damage.

Out-of-Stock Substitution/Upgrades

Cooper Bussmann #	Upgrade #	Description	Data Sheet #
AGC-(AMP)	ABC-(AMP)	FAST-ACTING, 1/4" X 1 1/2" FUSE	2001
AGC-V-(AMP)	ABC-V-(AMP)	FAST-ACTING, 1/4" X 1 1/2" FUSE WITH LEADS	2001
AGU-(AMP)	LP-CC-(AMP)	FAST-ACTING, 1/2" X 1 1/2" FUSE	2008
BAF-(AMP)	LP-CC-(AMP)	FAST-ACTING, 1/2" X 1 1/2" FUSE	2011
BAN-(AMP)	LP-CC-(AMP)	FAST-ACTING, 1/2" X 1 1/2" FUSE	2046
FNM-(AMP)	LP-CC-(AMP)	TIME-DELAY, 1/2" X 1 1/2" FUSE	2028
FNQ-R-(AMP)	LP-CC-(AMP)	TIME-DELAY, 500V, 1/2" X 1 1/2" FUSE	1012
FNR-R-(AMP)	LPN-RK-(AMP)SP	TIME-DELAY, 250V, CLASS RK5 FUSES	1019/1020
FRS-R-(AMP)	LPS-RK-(AMP)SP	TIME-DELAY, 600V, CLASS RK5 FUSES	1017/1018
JKS-(AMP)	LPJ-(AMP)SP	FAST-ACTING, 600V, CLASS J FUSE	1026/1027
KLU-(AMP)	KRP-C-(AMP)SP	TIME-DELAY, CLASS L FUSE	1013
KTK-(AMP)	KTK-R-(AMP)	FAST-ACTING, 600V, 1/2" X 1 1/2" FUSE	1011
KTK-R-(AMP)	LP-CC-(AMP)	FAST-ACTING, 600V, CLASS CC FUSE	1015
KTN-R-(AMP)	LPN-RK-(AMP)SP	FAST-ACTING, 250V, CLASS RK1 FUSE	1043
KTS-R-(AMP)	LPS-RK-(AMP)SP	FAST-ACTING, 600V, CLASS RK1 FUSE	1044
KTU-(AMP)	KPR-C-(AMP)SP	FAST-ACTING, 600V, CLASS L FUSE	1010
MDL-(AMP)	MDA-(AMP)	TIME-DELAY, 1/4" X 1 1/2" FUSE	2004
MDL-V-(AMP)	MDA-V-(AMP)	TIME-DELAY, 1/4" X 1 1/2" FUSE WITH LEADS	2004
MTH-(AMP)	ABC-(AMP)	FAST-ACTING, 1/4" X 1 1/2" FUSE	
NON-(AMP)	LPN-RK-(AMP)SP	GENERAL PURPOSE, 250V, CLASS H FUSES	1030
NOS-(AMP)	LPS-RK-(AMP)SP	GENERAL PURPOSE, 600V, CLASS H FUSES	1030
REN-(AMP)	LPN-RK-(AMP)SP	250V RENEWABLE FUSELINK	1028
RES-(AMP)	LPS-RK-(AMP)SP	600V RENEWABLE FUSELINK	1028
SL-(AMP)	S-(AMP)	TIME-DELAY, 125V, PLUG FUSE	1033
TL-(AMP)	T-(AMP)	TIME-DELAY, 125V, PLUG FUSE	1035

Cooper Bussmann® Electrical Trademarks

The following word trademarks are registered to Cooper Industries, Inc. for the use of the Cooper Bussmann division, electrical business unit:



Buss®
Bussmann®
CUBEFuse®
Edison®
Fusetron®
Limitron®
Low-Peak®
Magnum®
Optima®
Telpower®
Tron®
Typower®

The following trademarks are not yet registered:
Coordination Module™
Dura-Lag™
easyID™
Power Module™
Safety J™
Safety Module™
Surge3™

Industrial fuse applications

Industrial Applications

1. Interior Lighting
2. Computer Power
3. Switchboards
4. Motor Control Center
5. Emergency Lighting
6. UPS Backup Power Supplies
7. Transformer/Emergency Generator
8. Forklift Battery Charging Station
9. HVAC Chillers/Blowers
10. Welding Circuits
11. Plant Lighting
12. Distribution Panels
13. Disconnect Switches
14. Programmable Logic Circuits
15. Conveyor System

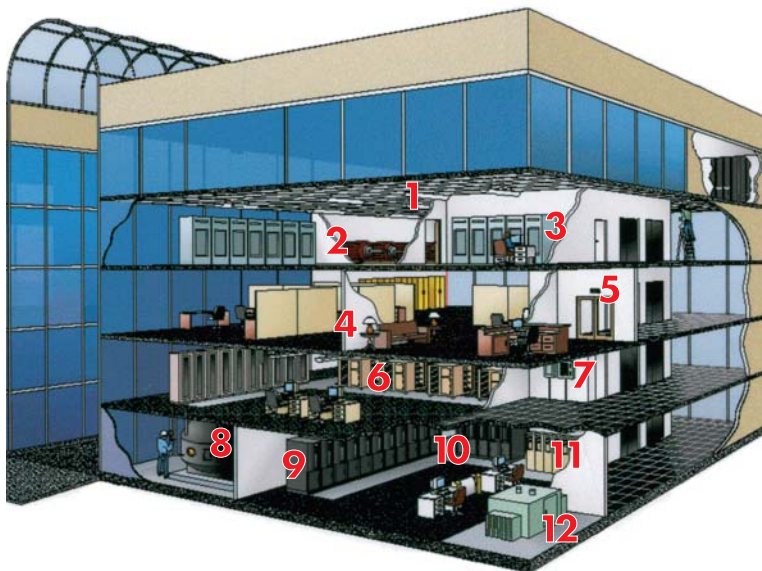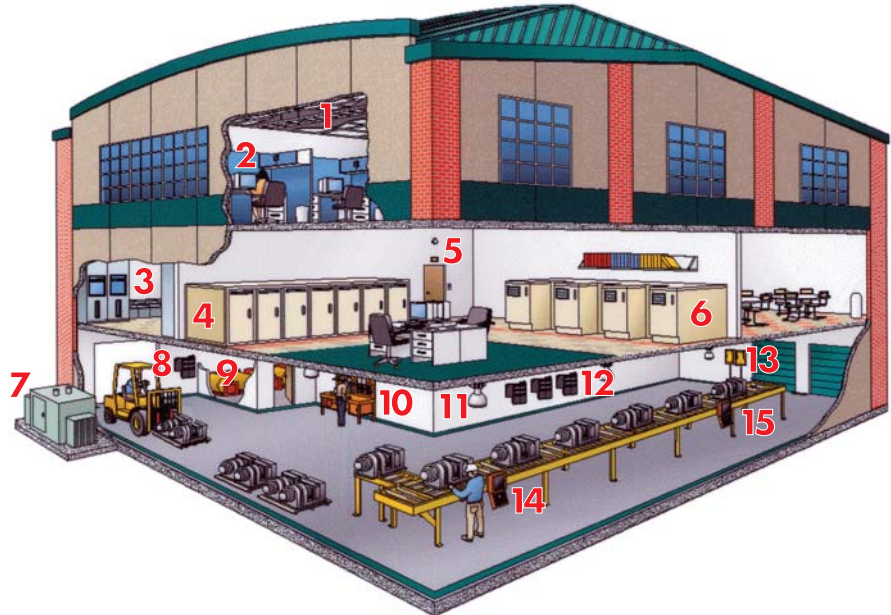

Commercial Applications

1. Interior Lighting
2. HVAC Blowers
3. Computer Power
4. Branch Circuits
5. Emergency Lighting
6. Load Centers
7. Disconnect/Distribution Panels
8. HVAC/Chillers
9. Switchboards/Motor Control Centers
10. UPS Backup Power Supplies
11. Elevator Control Centers
12. Transformer/Emergency Generator

Catalog number index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
1025	*	1A1838	*	2602	*	3723	272	51215	*
11 Type	344	1A1853	*	2604	*	3742	272	51235	*
11239-3PR	257	1A1907-	63	2605	*	3743	272	NO.550	*
11239-3SR	257	1A2294	*	2607	*	3794	*	NO.552	*
11240-3PR	257	1A2650	*	2608	*	3823	*	558730	*
11240-3SR	257	1A3398-	63	2610	*	3828	271	5591-	65
11241-3PR	257	1A3399-	62	2611	*	3833	*	5592-	65
11241-3SR	257	1A3400-	64	2650	*	3835	272	5623	*
11242-3PR	257	1A3746	*	2654	*	3839	*	5672-	65
11242-3SR	257	1A4533-	63	2698	*	3959	*	5674-	65
11675-	286	1A4534-	63	2703	*	3998	*	5678	*
11725-	286	1A4544	*	2714	*	39E	*	5681-	65
11960	*	1A4708	*	2772	*	4070	*	5682-	65
13195	*	1A4806	*	2778	*	4121	*	NO.575	*
13926	*	1A5018-	62	2795	*	4164	*	NO.577	*
14002	288	1A5041	*	2833	*	4178	*	5950	*
14004	288	1A5220	*	2834	*	4180	*	5956-	65
15087	350	1A5600-	64	2837	*	4202	*	5958	*
15100	346	1A5601-	62	2838	*	4207	*	5960-	65
15149	337	1A5602-	62	2839	*	4261	*	5961	*
15188	294	1A5603	*	2860	*	4287	*	5TPH	367
15200	346	1A5779	*	2960	*	4386	*	60/100BS	230
15242	*	1A5940	*	2989	*	4393	271	60/100LSC	230
15288	294	1A6004	*	2992	*	4399	*	6125	*
15506 KDM	42	1A6049	*	2A066	*	4402	*	6125TD	*
15515 KDR	42	1A8654	*	2A8	*	4405	270	6374	*
15595	*	1A9619	*	30LSC	230	4406	270	63A-DUMMY	*
15600	*	1B0021	*	323A2433P6	*	4407	*	64 _ _ _	42
15602	*	1B0048	*	32BS	230	4408	*	6415	*
15660	*	1B0049	*	3356	*	4410	*	6417	*
15800	344	1B0089	*	3373	*	4411	*	6418	*
15900	*	1BR021	*	3375	*	4412	*	6419	*
15968	*	1BR048	*	3411	*	4413	*	6420	*
160_ _	286	1BS1 _ _	106	3429	*	4415	*	64200	*
162_ _ _	286, 287	1CIF	*	3434	*	4421	272	6422	*
162_ _ _ UL	279	2004	*	3512	*	4422	*	6424	*
163_ _ _	284, 286, 287	2081	*	3513	*	4423	*	6427	*
163_ _ _ UL	279	20BS	230	3515	*	4427	*	64913	*
164_ _ _	*	20LSC	230	3519	*	4428	*	64926	*
165_ _ _	286, 287	21010	*	3520	*	4467	*	6525-25-0341	*
1683A75H08	*	21040	*	3521	*	4482	*	65372	*
170E	*	21050	*	3525	*	4483	*	65398	*
170H_ _ _ _	179-180	21065	*	3528	*	4512	*	6725	*
170L_ _ _ _	*	21100	*	3531	*	4513	*	675	*
170M_ _ _ _	110-178	21200	*	353837	*	4514	*	68100	*
170N_ _ _ _	*	2127	*	3544	*	4515	272	68_ _ _	42
170R_ _ _ _	*	2177	*	3545	*	4520	271	6NZ01	*
170T_ _ _ _	*	2178	*	3552	*	4522	*	7 Type	352
171A_ _ _ _	*	2201	*	3553	*	4525	*	70 Series	350
17415	*	2245	*	3554	*	4528	*	70-	350
175GDMSJD	*	NO.232	*	3555	*	4529	*	71-0192	*
175GXQNJD	*	2322	*	3556	*	4530	*	72	*
1768A40H	*	NO.233	*	3562	*	4532	*	74 Type	352
19315	*	NO.234	*	3569	*	4534	*	75 Type	353
19320	*	24 Type	352	3571	*	4535	*	76 Type	353
1976	*	2429	*	3572	*	4537	*	NO.756	*
1A0065	86	2430	*	3575	*	4561	*	NO.757	*
1A0835	*	2432	*	3576	*	4567	*	NO.758	*
1A1119-	63	246B9949BG	*	3578	*	4574	270	NO.759	*
1A1120-	63	2487	*	3580	*	4586	*	NO.760	*
1A1310	*	2494	*	3591	*	4648	*	NO.761	*
1A1360	*	2499	270	3594	*	4909	*	NO.762	*
1A1478	*	25499	*	3595	*	4NZ01	*	NO.763	*
1A1837	*	2601	*	3604	*	510	*	80 Type	345

* Not listed in this catalog. Call Cooper Bussmann Customer Satisfaction for more information. Call 636-527-3877.

Catalog number index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
80910	*	AMWNA	82	C10G	227	CBD	*	CDHZX_	324
81 Type	353	ANL	48	C10M	228	CBF	*	CDH_S	315, 327, 329
82048	*	ANN	48	C10NL	240	CBP	*	CDMB	*
8414677	*	ASZ350B3	*	C14G	227	CBPUB-ES-ED1H	372	CDMC1	327
84345	*	AT	*	C14G_S	229	CBPUB-ES-ED2H	372	CDN	215
8456A85H	*	ATC	49	C14M	228	CBPUB-ES-ED3H	372	CDN63P	*
847966108	*	ATF	*	C14M_S	229	CBPUB-ES-ED30H	372	CDNF_ _ _	325, 327-329
8583A36H	*	ATM	49	C14NL	240	CBPUB-ES-ED31H	372	CDS	215
8588A81H	*	B22-	336	C19	*	CBPUB-ES-ED32H	372	CDS_ _ T	328
88914568	*	B40	*	C22G	227	CBPUB-ES-ED33H	372	CDS_ _ _ P	316, 328
9078A67G04	86	B48	*	C22G_S	229	CBPUB-ES-ED34H	372	CDS_ _ _ S	315, 327
9435	*	B83	*	C22M	228	CBPUB-ES-ED35H	372	CDS6	*
9483	*	B84	*	C22M_S	229	CBPUB-ES-ED36H	372	CDS8	*
9732	*	B93	*	C22NL	240	CBS	*	CDS9	*
9789	*	BAF	43	C2617	*	CBSV-ES-ED1	372	CDSWM	327
9834	*	BAN	43	C2791	*	CBSV-ES-ED3	372	CDTL	*
9835	*	BAO	221	C2909	*	CBSV-ES-ED4	372	CDTS	*
9838	*	BBS	46	C30BS	230	CBSV-ES-ED5	372	CEO	221
9841	*	BBU	69	C30F	230	CBSV-ES-ED6	372	CFC60J	318
9843	*	BBU-EFID	*	C30FBS	230	CBSV-ES-EN1	370	CFCVR100	318
A3354705	*	BC	222	C4044	*	CBSV-ES-EN2	370	CFD-	314-317
A3354710	86	BC603_ _ _	256	C4534	*	CBSV-ES-EN3	370	CFZ_	318
A3354720	*	BCA603_ _ _	255	C4559	*	CBSV-ES-EN4	370	CFTS100	318
A3354730	86	BCC	*	C515	54	CBSV-ES-EN5	370	CFZ	*
A3354745	*	BCCM	*	C517	54	CBSV-ES-EN6	370	CGL	216
A404302	*	BCCM603	*	C518	54	CBSV-ES-EN7	370	CH_ _ _ J_	236
AAO	221	BCF	*	C519	54	CBSV-ES-EN8	370	CH_ _ _ J_ I	236
ABC	58	BD	222	C520	54	CBSV-ES-EN9	370	CH08_ _ _ _	239
ABC-V	58	BDAUX_	331	C5237	*	CBSV-ES-TELP	373	CH10	*
ABCNA	82	BDDHK	*	C5268-	106	CBSV-ES-TEMP	373	CH10CL	*
ABFNA	82	BDF	*	C5898	*	CBSV-ES-TEHP	373	CH10CM	*
ABGNA	82	BDFH	*	C60BS	230	CBSV-SC-EN1	370	CH14_ _ _ _	239
ABS	*	BDFL	*	C60F	230	CBSV-SC-EN2	370	CH14-HP	240
ABU	*	BDH_ _ _	316, 317, 320, 328, 330	C60FBS	230	CBSV-SC-EN3	370	CH14MS- _ D	240
ABWNA	82	BDNF_ _ _ _	326, 330	C6344	*	CBSV-SC-EN4	370	CH22_ _ _ _	239
AC	222	BDS_ _ _	317, 319, 330	C7018	*	CBSV-SC-EN5	370	CH810-HP	240
ACB	*	BDST_ _	317	C7019	*	CBSV-SC-EN6	370	CHCC_ _	239
ACF	*	BDTA_ _	318, 320	C7020	*	CBSV-SC-EN7	370	CHM_ _ _ _	239
ACH	*	BDTL_ _ _	318, 320, 330	C7021-	357	CBSV-SC-EN7	370	CIF06	217
ACK	*	BDTS_ _	326	C7024-	358	CBTR-ES-1DA	372	CIF21	217
ACL	*	BDZD	*	CAV	82	CBTR-ES-1HP	372	CIH	219
ACO	*	BDZW	*	CAVH	82	CBTR-ES-2HP	372	CIK	219
AD	222	BDZX_ _	331	CB123	*	CBTR-SC-1HP	372	CIL	219
ADL	*	BFW	*	CB174	*	CBTR-SC-2HP	372	CJ	218
ADLSJ	81	BG30_ _ _ _	256	CB174B	*	CBT	*	CM_ _ _ CF	230
ADOSJ	81	BGH	*	CB174M	*	CBU	*	CM_ _ CF	*
AF	*	BH- _ _ _ _	257	CB181F	*	CCB	*	CP14002	*
AFS	*	BH- _ XXX	106	CB181P	*	CCC	*	CPB16_	286
AFX	*	BM603_ _	256	CB184F	*	CCE	*	CPDB-	286
AGA	57	BMA603_ _ _	255	CB184P	*	CCG	*	CPS-C	*
AGA-V	57	BNQ21-WH	297	CB185	*	CCSK-45	363	CS/XMAS-6F	*
AGC	58	BP/AGX	*	CB185P	*	CD	222	CT	185
AGC-V	58	BP/GLH	*	CB1911	*	CD1	*	CUG	*
AGS	*	BP/MAS	*	CB1921	*	CD100	*	D125	223
AGU	*	BP/XMAS	*	CB203107S2105	*	CD27	*	D16	223
AGW	57	BQ655	*	CB211	*	CD33	*	D27	223
AGX	57	BQE	*	CB212	*	CDAUX_ _ _	318	D33	223
AGX-V	57	BQQ41-WH	297	CB221	*	CDB	*	DCM	44
AGY	*	BRT	*	CB222	*	CDBY_ _ _ _	327	DD	222
AL-D	240	BRW	*	CB223	*	CDC	*	DEO	221
ALS	*	C08G	227	CB3	*	CDE	*	DFC	*
ALW	*	C08M	228	CB5	*	CDH4	317	DFJ	25
AMG	*	C08NL	240	CBB	*	CDHX_ _ _	316, 317, 320, 328, 329	DIA	*
AMI	*			CBC	*			DLN-R	31

* Not listed in this catalog. Call Cooper Bussmann Customer Satisfaction for more information. Call 636-527-3877.

Catalog number index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
DLS-R	31	FBM	61	FWL	210	HEB	261	HN-3	*
DRA-1	366	FBP	*	FWP	101, 202-205	HEC	261	HN-5	*
DRA-2	366	FC	*	FWS	210	HEF	*	HOB	*
DRLC-A	*	FCB	*	FWX	95, 194	HEG	261	HOF	*
E-6188	*	FCC	*	G30060	256	HEH	261	HPC-D	269
EBI055-	71	FCU	*	GBA	47	HEJ	261	HPD	268
ECF	*	FD _ _ _ _ _	314, 319	GBB	58	HET	261	HPF	268
ECL055-	71	FDM	*	GBB-V	58	HEX	261	HPG	268
ECL155-	72	FE	185	GBC	*	HEY	261	HPL	*
ECNR	*	FE2475-	*	GDA	*	HFA	260	HPM	269
ECSR	*	FEE	185	GDA-V	*	HFB	259	HPS	268
ED	222	FEH	*	GDB	*	HFB-10	259	HPS2	269
EDA	*	FF	222	GDB-V	*	HGA	*	HR	260
EET	185	FG	222	GDC	*	HGB	*	HRC	220
EF	222	FH2	*	GDC-V	*	HGC	*	HRE	*
EFB-	323, 324	FHL	*	GF	222	HHB	259	HRF	*
EFF	*	FHN	*	GFA	*	HHC	50	HRG	*
EFH	*	FL-	*	GG	222	HHD	50	HRH	*
EFJ-	320, 323, 324	FL11H _ _	85	GH	222	HHF	50	HRI	*
EFL	323, 324	FL11K _ _	85	GKB	*	HHG	50	HRI	*
EFS	222	FL11N _ _	*	GKJ	*	HHH	*	HRJ	*
EK	*	FL11T _ _	85	GLD	47	HHI	*	HRK	259
ELN	*	FL12K _ _	85	GLH	*	HHJ	*	HSK	*
EN6	*	FL1A5	*	GLN	*	HHK	*	HTB-	265-266
ENA	*	FL3H	*	GLP	230	HHL	50	HTC-10M	*
ENF-	332-335	FL3K _ _ _	85	GLQ	51	HHM	50	HTC-140M	62
ENN	*	FL3T _ _ _	85	GLR	52	HHN	*	HTC-15M	62
EP _ M230 _ _ GCC	310, 311	FLB	*	GLX	*	HHR	*	HTC-200M	62
ERK-28	356	FLD	*	GMA	56	HHT	260	HTC-210M	62
ERS2	*	FLF	*	GMA-V	56	HHX	50	HTC-30M	263
ERS30	*	FLM	*	GMC	56	HIF	*	HTC-35M	263
ESD	221	FLN	*	GMC-V	56	HJL	267	HTC-40M	263
ET	185	FLS	*	GMD	56	HJM	*	HTC-45M	60
ETF	*	FM	185	GMD-V	56	HK-	267	HTC-50M	60
EVF	*	FM01A	*	GMF	52	HKA	*	HTC-55M	263
F01A	*	FM08A	*	GMQ	51	HKL	*	HTC-60M	60
F02A	*	FM09A	*	GMT	351	HKP	264	HTC-65M	60
F02B	*	FM09B	*	GMT-A	351	HKP-BBHH	264	HTC-70M	263
F03A	*	FMM	185	GMW	*	HKP-HH	264	HVA	83
F03B	*	FMX	*	GOB	*	HKP-L	264	HVB	83
F06A	*	FNA	47	GRF	52	HKP-LW-HH	264	HVJ	83
F07A	*	FNJ	*	GSK-260	363	HKP-OO	264	HVL	83
F09A	*	FNM	45	H25 _ _ _ - _	242	HKP-W	264	HVR	83
F09B	*	FNQ	45	H60 _ _ _ - _	245	HKQ	*	HVT	83
F10A	*	FNQ-R	32	HAC-R	*	HKR	267	HVU	83
F15A	*	FNW	*	HAS-R	*	HKT	267	HVV	83
F15B	*	FP-2	367	HBC	*	HKU	267	HVX	83
F16A	*	FP-3	367	HBH-I	61	HKX	267	HWA	*
F16B	*	FP-4	367	HBH-M	61	HLA	*	IXL70F	*
F19B	*	FP-6	367	HBM	*	HLD	267	J-13	368
F29A	*	FP-A3	367	HBO	*	HLQ	51	J-16	318
F38-	*	FR-1000	*	HBP-	*	HLR	52	J-21	368
F380	*	FRN-R	22	HBS-	*	HLS	351	J-23	368
F60C	*	FRS-R	24	HBV-I	61	HLT	351	J-26	368
F61C	*	FSD	*	HBV-M	61	HM	260	J-41	368
F62C	*	FT-2	367	HBW-I	61	HME	*	J-42	368
F63C	*	FT-3	367	HBW-M	61	HMF	*	J-62	368
F64C	*	FTI	*	HC-	*	HMG	*	J-63	368
F65C	*	FTM	*	HC1	*	HMH	*	J-64	368
F7036-	*	FWA	91, 93, 192	HC2	*	HMI	*	J- _	368
FA02	*	FWC	200	HC3	*	HMJ	*	J101/J	*
FA2A	*	FWH	97, 196-199	HC7	*	HMK	*	J201/J	*
FA4H	*	FWJ	104, 208	HC8	*	HMR	*	J301/J	*
FBI	61	FWK	206	HCM	*	HN-1	*	J60 _ _ _ - _	248
								J70032	211

* Not listed in this catalog. Call Cooper Bussmann Customer Satisfaction for more information. Call 636-527-3877.

Catalog number index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
J70100	211	KCC	42	KT3-RE	*	MIC	47	No. 220	365
JA60030	250	KCD	42	KT3-WH	296	MIJ	*	No. 226	368
JB1	*	KCE	42	KT4-WH	296	MIN	47	No. 242	368
JB3	*	KCF	42	KTE	*	MIS	48	No. 2621	368
JCA	*	KCH	42	KTJ	*	MKA	*	No. 263	368
JCD-	74	KCJ	42	KTK	43	MKB	*	No. 2641	368
JCE-	74	KCM	42	KTK-R	29	MKG	*	No. 2642	368
JCG-	77	KCM-B	42	KTN-R	27	MMB	*	No. 2661	368
JCH-	77	KCR	42	KTN-S	*	MMT	185	No. 2662	368
JCI-	74	KCS	42	KTQ	46	MP2	*	No. 2664	368
JCK-	77	KCV	42	KTS-R	28	MP2A	*	No. 270	365
JCK-A-	77	KCY	42	KTS-S	*	MPR	*	No. 2880	*
JCK-B-	77	KCZ	42	KTU	30	MS100	*	No. 36	364
JCL-	77	KDA	42	KU-	303	MSK-45	363	No. 4	366
JCL-A-	77	KDB	42	KWN-R	*	MSL	*	No. 5	366
JCL-B-	77	KDC	42	KWS-R	*	MSW710	*	No. 6	366
JCM	*	KDD	42	LA	*	MT	185	No. 7	366
JCN	*	KDE	42	LA8D324	*	MT12	*	No. 8	366
JCP	*	KDF	42	LAA	*	MTC6	*	NON	36
JCQ-	74	KDH	42	LAC	*	MTH	*	NOS	36
JCR-A	77	KDJ	42	LAG	*	MTMU	*	NPL	*
JCR-B-	77	KDM	42	LAN	*	MV055-	73	NRA37	287
JCT-	74	KDP	42	LAR	*	MV155-	73	NSD	221
JCU-	75	KDR	42	LCT	182	N512-BK	292	NSE3-WH	293
JCW-	74	KDT	42	LCU	*	NBB	*	NSS3-WH	293
JCX-	75	KDU	42	LD1	*	NBC	*	NTN-R-	368
JCY-	75	KDY	42	LD2	*	NBE	*	NTQ23-WH	297
JCZ-	75	KEF	*	LEF	*	NC3-WH	293	NTS-R-	368
JDN	*	KEM	*	LET	182	ND-1260	*	NUE	*
JDZ-	75	KER	*	LKB	*	NDN	290	NXA	*
JF1	*	KEW	42	LKC	*	NDN1-WH	291	NXC	*
JJN-	33	KEX	42	LKN	*	NDN111-	291	NZ01	223
JJS-	34	KFH-A	42	LKS	*	NDN3-	290	NZ02	223
JKS	26	KFM	42	LMMT	182	NDN63-	290	NZ_	223
JN	*	KFT	42	LMT	182	NDNA1	318	OEFGMA	84
JP60030 - _ _ _ _	250	KFZ	42	LP-CC	19	NDNAS	287	OEGMA	84
JPA-3	*	KGC	*	LPF1-	*	NDND1	*	OHFMA	84
JSK-36	363	KGJ	*	LPJ_SPI	15	NDNF1-WH	273	OHGMA	84
JT(N)60030	237	KGJ-A	*	LPJ_SP	15	NDNFD1	*	OIA	*
JT(N)60060	237	KGJ-E	*	LPN-RK_SP	16	NDNLFD1	273	OJ	*
JT60030	237	KGL	*	LPN-RK_SPI	16	NDNV4-	290	OLGMA	84
JT60060	237	KGO-E	*	LPRK-28	364	NFA	*	OPM-1038	232, 233
JTN60030	237	KGS	*	LPS-RK_SP	16	NFT2-WH	292	OPM-NG-SC3	234
JTN60060	237	KGS-A	*	LPS-RK_SPI	16	NFT3-	292	OPM-NG-SM3	234
JU	*	KGT	*	LPT	*	NFTA	287	OPMNGSA	234
KAA	*	KGX	*	LS1D3	*	NH_ _ _ G-690	226	OPMNGSAAUX	234
KAB	*	KGY	*	MA-5	*	NH_ _ _ M	226	OPMRH	325
KAC	99	KIG	42	MAI	*	NHG_ _ _ B	224	OSD	221
KAD	*	KJA	*	MAS	*	NI	*	OSP	*
KAF	*	KJB	*	MAX	49	NITD	221	PCB	*
KAJ	*	KLC	*	MB-	*	NNB	368	PCC	*
KAL	*	KLM	43	MBO	*	NNB-R	368	PCD	*
KAW	*	KLP	*	MCRW	*	NNC	368	PCF	*
KAX	*	KLU	30	MDA	59	No. 1	366	PCG	*
KAZ	48	KMH-C	*	MDA-V	59	No. 100	*	PCH	*
KBC	100	KOS15	*	MDF	*	No. 140	365	PCI-	*
KBD	*	KPF	42	MDL	59	No. 15	*	PCT	351
KBJ	*	KQO	42	MDL-V	59	No. 2	366	PDB_ _ _	278
KBO	*	KQT	42	MDM	*	No. 200	*	PDBFS_ _ _	277
KBR	*	KQV	42	MDQ	59	No. 201	*	PF1	*
KBT	*	KQW-M	*	MDQ-V	59	No. 204	*	PLK3-	296
KBY	*	KRP-CL	21	MDX	*	No. 205	*	PLU1-WH	295
KCA	42	KRP-C_SP	20	MEQ	*	No. 213	368	PLU11	*
KCB	42	KS-19392-L36	*	MFN	*	No. 216	368	PLU111	*

* Not listed in this catalog. Call Cooper Bussmann Customer Satisfaction for more information. Call 636-527-3877.

Catalog number index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
PLU3-	295	SL-	37	TP/MDA-B-30	*	WKNHO	80		
PMP	312, 313	SM363	308, 309	TP158HC	337	WKS	*		
PON	215	SNF-7K	*	TP15900	*	WKU	*		
PS	312, 313	SNF-7M	*	TP15900-4	335	WKV	*		
PS1RPLSW	*	SNL-7K	*	TP15914	334	WLF	*		
PSU1-WH	295	SOA72	287	TP2	*	WMB	*		
QC202/J	*	SOU	258	TP3	*	WMM	*		
QC203/J	*	SOW	258	TP4	*	WMMQ	*		
R25	243	SOX	258	TPA	335	WPQ	*		
R60	246	SOY	258	TPA-B	335	WQL	*		
REG	*	SOY-B	258	TPB	*	WQN	*		
REN	*	SPJ	*	TPC	332	WQP	*		
RES	*	SPP	*	TPCDS	332	WSE	*		
RFI	*	SRA-R	*	TPH	*	WSH	*		
RFL	*	SRD	*	TPHCS-	339	WSL	*		
RK1SK-39	363	SRT-A	*	TPJ	*	WSM	*		
RK5SK-39	363	SRU	258	TPL	340	WSP	*		
RLA	*	SRU-BC	*	TPM	333	WSQ	*		
RLC	*	SRW	258	TPMDS	333	WST	*		
RYA	*	SRX	258	TPN	341	WSU	*		
RYC	*	SRY	258	TPS	336	WTJ	*		
S-	38	SSD	221	TPSFH-	368	WTK	*		
S-8001	270	SSN	*	TPW	*	WTT	*		
S-8002	270	SSU	258	TPWDS	*	WTZ	*		
S-8101	270	SSW	258	TR6/MCRW	*	WUC	*		
S-8102	270	SSX	258	TRF	*	WUD	*		
S-8201	270	SSY	258	TS-	304-306	WUE	*		
S-8202	270	SSY-RL	258	TVS-	360	WUG	*		
S-8203	270	STD	221	TVSS-	361	WUH	*		
S-8301	270	STI	*	UCB	*	WUI	*		
S3Holder	*	STM	*	UHA	*	WUQ	*		
S500-R	55	STY	258	UHC	*	WUR	*		
S500-R-V	55	SYC	*	UHH	*	WUU	*		
S501-R	55	SZQ	*	UHS	*	WUV	*		
S501-R-V	55	T-	38	UHT	*	WUW	*		
S504	*	T1320-2R	*	UHW	*	WUY	*		
S505	*	T30	251	ULR	*	WVA	*		
S506-R	55	T60	253	VFNHA	80	WVQ	*		
S506-R-V	55	TB100-	298	VKNHA	80	WVR	*		
SA-	38	TB200-	300	W-	37	WWD	*		
SAMI-	241	TB200HB-	300	WDFHO	80	WWE	*		
SB	*	TB300-	302	WDLJSJ	80 & 81	WWF	*		
SC	35	TB345-	302	WDOH6	80	WWG	*		
SCV15	*	TB400-	306	WDOSJ	81	WWI	*		
SCV20	*	TBM-14M	42	WER	344	WWK	*		
SCY	258	TC	*	WFFHO	80	WWL	*		
SDA	*	TCF	13	WFLSJ	80 & 81	WWU	*		
SDLSJ	81	TCFH	13	WFMSJ	80	WWV	*		
SDMSJ	81	TCP	*	WFNHO	80	WWX	*		
SDQ	*	TDC	*	WFOH6	80	WYG	*		
SDQSJ	81	TDC10	*	WFOSJ	81	WYM	*		
SEW-5B	*	TDC11	*	WGA	*	WZC	*		
SF25H	*	TDC180	*	WHA	*	WZJ	*		
SFB1030	*	TDC600	*	WHN	*	WZK	*		
SFC-FUSE-CAB	367	TDP	*	WIE	*	WZL	*		
SFD27	*	TFC	*	WJON6	80	WZX	*		
SFE	*	TFF	*	WKB	*	XL25X	*		
SFLSJ	81	TFL	*	WKFOH	80	XL50F	*		
SFMSJ	81	TGC	*	WKH	*	XL70F	*		
SFQSJ	81	TGH	*	WKJ	*				
SFR	*	THL	*	WKK	*				
SFR1	*	TIQ	*	WKL	*				
SKA	258	TJD	*	WKLSJ	81				
SKLSJ	81	TL-	37	WKMSJ	80 & 81				

* Not listed in this catalog. Call Cooper Bussmann Customer Satisfaction for more information. Call 636-527-3877.

Sales Support & Manufacturing Facilities

North America - World Headquarters

Cooper Bussmann
P. O. Box 14460
St. Louis, Missouri 63178-4460 USA
Telephone: 636-394-2877
Fax: 800-544-2570
Email: fusebox@cooperbussmann.com

Bussmann Mexico

Cooper Wiring Devices
Tres Anegas 431
Col. Nueva Industrial Vallejo
CP07700 D.F. Mexico
Telephone: 52-55-5747-6228
Fax: 52-55-5754-0837

Bussmann S.A. de C.V.

P.O. Box 17649
El Paso, TX 79915
Telephone: 915-633-0600
Fax: 915-633-0643

Cooper Bussmann

210 Dixie Trail
Goldsboro, NC 27530-7167
Telephone: 919-734-3900
Fax: 919-734-8217

Cooper Bussmann Transportation

175 Hansen Court
Wood Dale, IL 60191
Telephone: 630-422-2400
Fax: 630-422-2500

Cooper Electronic Technologies

1225 F Broken Sound Parkway
Boca Raton, FL 33487
Telephone: 561-988-4100
Fax: 561-241-6640

Asian Headquarters

Cooper Bussmann
Cooper Electric (Shanghai) Co. Ltd.
No. 955 Shengli Road
Heqing, Pudong, Shanghai 201201 China
Telephone: 8621-2899-3888
Fax: 8621-2899-3997

Bussmann India

Cooper Bussmann India
(Private) Limited
#3 EVR Street, Sedarapet
Pondicherry – 605 111
India
Telephone: 91-413-2678203
or 91-413-2678204
Fax: 91-413-267-7010

Cooper Bussmann

Save Fusetech, Inc.
101 Wins Tower (ex Chun Gang Ind. Building)
278-51, 2 Ka, Sungsoo-dung
Sungdoug-gu
Seoul, Korea 133832
Telephone: 82-2-499-3636
Fax: 82-2-498-4518

Cooper Xi'an

Xi'an Fusegear, Ltd.
292 Hanguanig Rd. South Section
Xi'an, China 710055
Telephone: 86-29-8821-9424
Fax: 86-29-8822-9227

Silver Victory

Hong Kong Limited (JV)
7th Tinfung Industrial Mansion
63 Wongchuk Hang Rd.
Aberdeen, Hong Kong
Telephone: 852-287-34-038
Fax: 852-251-80-483

European Headquarters

Cooper (UK) Ltd.
Bussmann Division - Melton Road
Burton-on-the-Wolds
Leicestershire LE12 5th England
Telephone: 44-1509-882737
Fax: 44-1509-882786

Bussmann Denmark

Bussmann International, Inc.
5 Literbuen
DK-2740 Skovlunde
Copenhagen Denmark
Telephone: 45-4485-0900
Fax: 45-4485-0901

Enbray Contactors

Enbray Cooper Bussmann (UK) Limited
Unit 5a
Derwent Drive
Workington, Cumbria CA14 3YW England
Telephone: 44-1946-839000
Fax: 44-1946-833000
Email: enbray@enbray.co.uk

South American Headquarters

Bussmann Brazil

Bussmann do Brasil Ltda.
Rodovia Santos Dumont, km 23
13.300-000, Caixa Postal 095
Itu – Sao Paulo Brasil
Telephone: 55-11-4024-8400
Fax: 55-11-4024-8424